


### AEC Premier Straw® Staple Pattern Guide

For 8 ft wide AEC Premier Straw Erosion Control Blankets  
Adjust horizontal staple spacing for 16 ft wide Premier Straw Erosion Control Blankets

Application	Slope		
	≤ 4H:1V	≤ 3H:1V	≤ 2H:1V
Staple Pattern	A	B	C

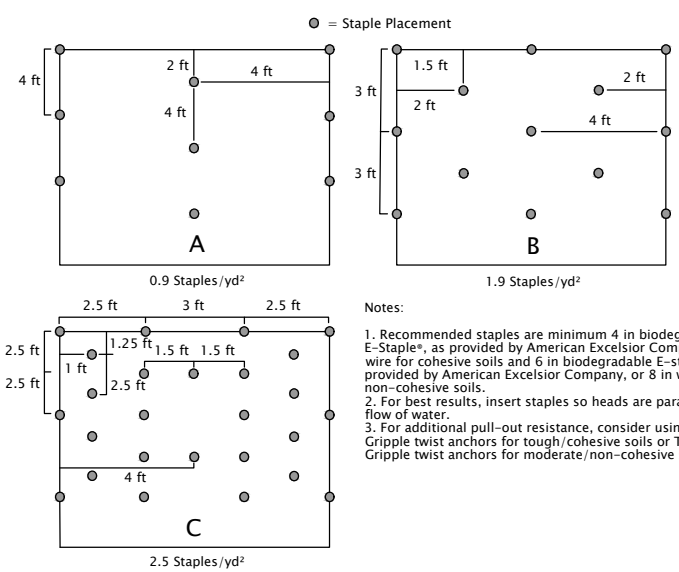

- Notes:
1. Recommended staples are minimum 4 in biodegradable E-Staple®, as provided by American Excelsior Company, or 6 in wire for cohesive soils and 6 in biodegradable E-staple®, as provided by American Excelsior Company, or 8 in wire for non-cohesive soils.
  2. For best results, insert staples so heads are parallel to the flow of water.
  3. For additional pull-out resistance, consider using TL-TA2 Gripple twist anchors for tough/cohesive soils or TL-TA1 Gripple twist anchors for moderate/non-cohesive soils.



AMERICAN EXCELSIOR COMPANY  
ARLINGTON, TEXAS

SHEET DESCRIPTION  
AEC PREMIER STRAW®  
SLOPE APPLICATION DETAIL

DATE 11/22/23	DRAWN BY	
SCALE NONE	PROJECT NO.	SHEET NO. 2