



SLOPE DETAIL
NO SCALE




OVER SLOPE CREST METHOD
NO SCALE

DO NOT NEED TO TRENCH BLANKET IN IF IT CAN BE EXTENDED A MINIMUM OF 3'-0" OVER THE CREST OF THE SLOPE.

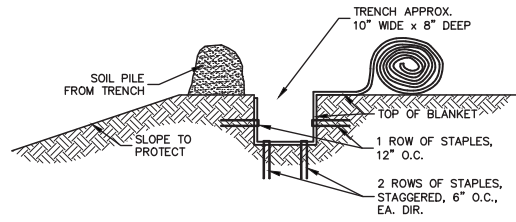


STEP 1

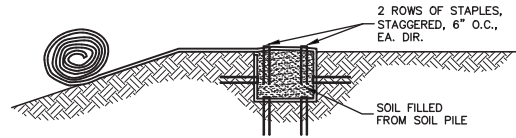


STEP 2


SLOPE TRENCHING METHOD "A"
NO SCALE




END ROLL OVERLAP
NO SCALE

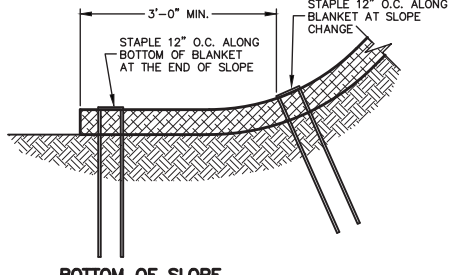

BOTTOM OF SLOPE TERMINATION
NO SCALE

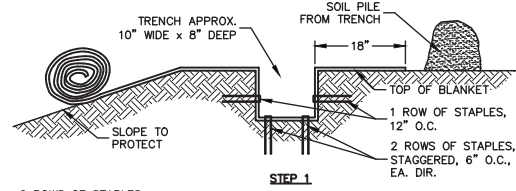

STEP 1

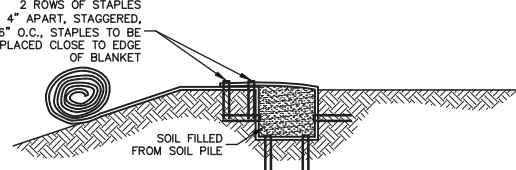

STEP 2




SLOPE TRENCHING METHOD "B"
NO SCALE

AEC Premier Straw® Staple Pattern Guide


For 8 ft wide AEC Premier Straw Erosion Control Blankets
Adjust horizontal staple spacing for 16 ft wide AEC Premier Straw Erosion Control Blankets

Application	Slope		
	≤ 4H:1V	≤ 3H:1V	≤ 2H:1V
Staple Pattern	A	B	C

● = Staple Placement



- Notes:**
1. Recommended staples are a minimum 4 in biodegradable E-Staple®, as provided by American Excelsior Company, or 6 in wire for cohesive soils and 6 in biodegradable E-Staple®, as provided by American Excelsior Company, or 8 in wire for non-cohesive soils.
 2. For best results insert staples so heads are parallel to the flow of water.



SIDE SEAM OVERLAP STAPLE DETAIL
NO SCALE

