


NOTES:


- SEE AEC PREMIER STRAW/COCONUT™ SLOPE APPLICATION DETAIL SHEET FOR PROPER SLOPE INSTALLATION.

CHANNEL DETAIL
NO SCALE


SIDE SEAM OVERLAP STAPLE DETAIL
NO SCALE

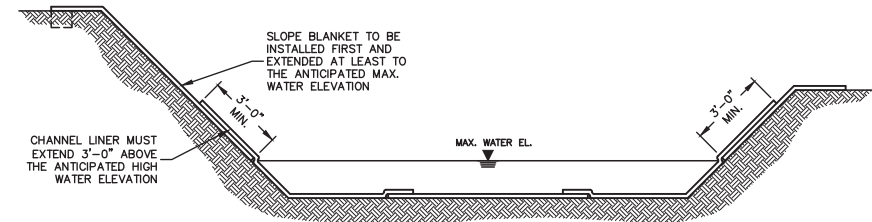



CHANNEL INSTALLATION METHOD "A"
NO SCALE

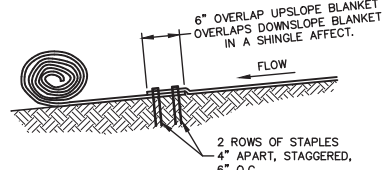


CHANNEL BLANKET END OF ROLL OVERLAP
NO SCALE

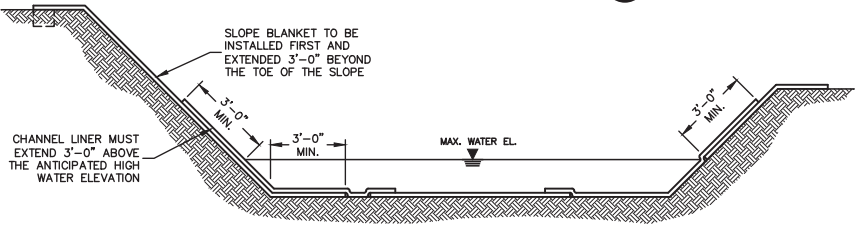


CHANNEL INSTALLATION METHOD "B"
NO SCALE

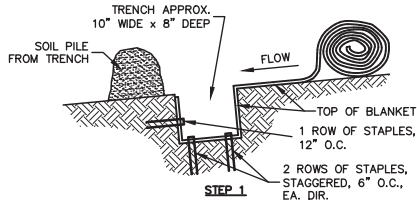

CHANNEL TRENCHING METHOD "A"
NO SCALE



CHANNEL TERMINATION PLAN
NO SCALE




CHANNEL TERMINATION
NO SCALE




AEC Premier Straw/Coconut™ Staple Pattern Guide

For 8 ft wide AEC Premier Straw/Coconut Erosion Control Blankets

Application	Channel Shear Stress ≤ 2.0 lb/ft ² (96 Pa)
Staple Pattern	B



- Notes:**
- Recommended staples are a minimum 4 in biodegradable E-Staple®, as provided by American Excelsior Company, or 6 in wire for cohesive soils and 6 in biodegradable E-Staple®, as provided by American Excelsior Company, or 8 in wire for non-cohesive soils.
 - For best results insert staples so heads are parallel to the flow of water.
 - Adjust staple pattern so staples are placed in critical channel points (e.g. slope interface, channel bottom) as illustrated below:

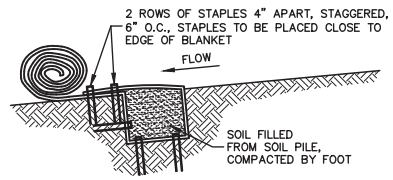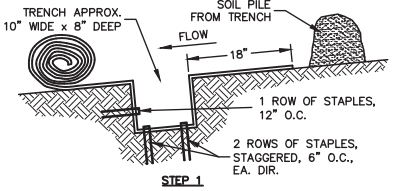

CHANNEL TRENCHING METHOD "B"
NO SCALE

