


CHANNEL INSTALLATION
END VIEW
NO SCALE 1
29B

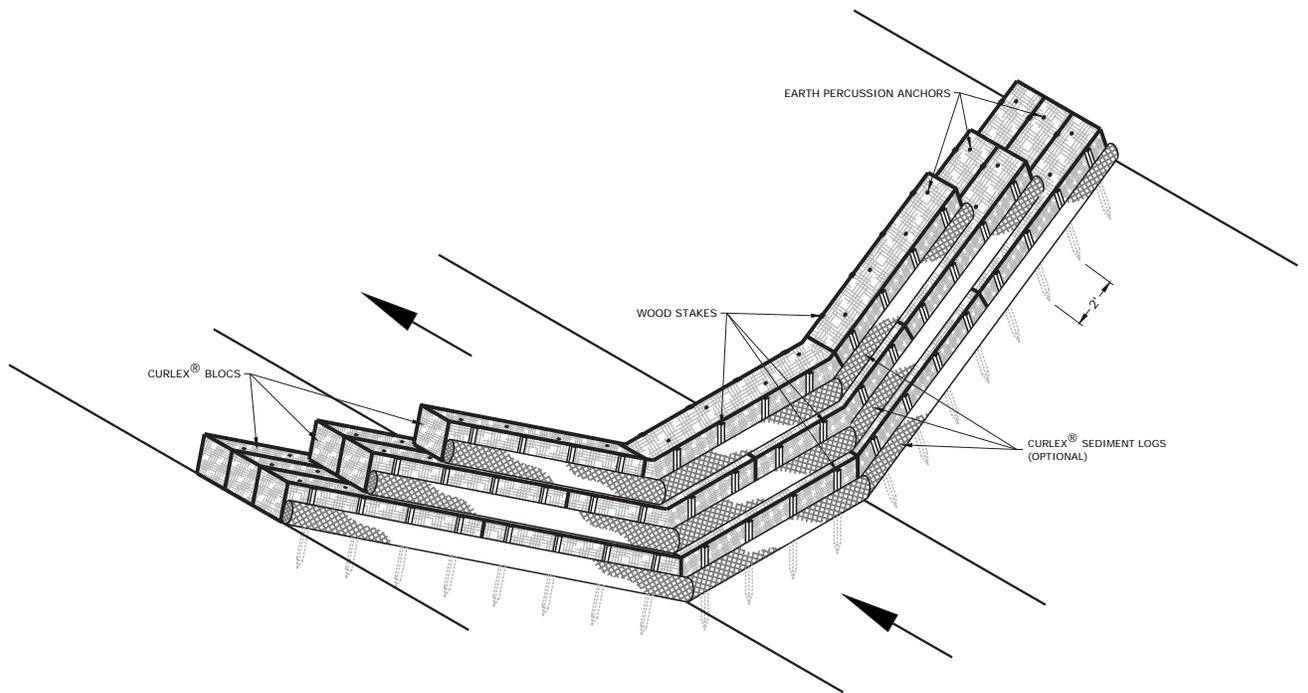

CHANNEL INSTALLATION DETAIL
NO SCALE 2
29B

NOTES:

- 1) WOODEN STAKES ARE 4FT. LONG (2"x2").
- 2) OFF-SET SEEMS BY ALTERNATING 4' AND 8". SEE DETAILS 1/29A, 2/29A, 3/29A.
- 3) BOTTOM ROW OF CURLEX® BLOCS ARE SECURED BY WOODEN STAKES AND EARTH PERCUSSION ANCHORS SPACED EVERY 2' ALTERNATING.
- 4) MIDDLE AND TOP ROW OF CURLEX® BLOCS SECURED BY EARTH PERCUSSION ANCHORS EVERY 2'.
- 5) CURLEX® ENFORCER® LINING CHANNEL SECURED BY 6" STAPLES PER STAPLE PATTERN GUIDE.
- 6) CURLEX® ENFORCER® WILL BE TRENCHED 3' OVER CREST OF SLOPE.
- 7) SIDE SLOPE IS 2:1 AND A GENTLE BED SLOPE OF ABOUT 0.5%.
- 8) OFF-SET SEEMS WHEN USING CURLEX® SEDIMENT LOGS.



AMERICAN EXCELSIOR COMPANY
ARLINGTON, TEXAS

SHEET DESCRIPTION
CURLEX® BLOC
FILTRATION DETAIL

DATE 5/15/17
SCALE NONE

DRAWN BY
PROJECT NO.
SHEET NO. 29B