



NOTES:
 1. SEE CURLEX® NETFREE™ SLOPE APPLICATION DETAIL SHEET FOR PROPER SLOPE INSTALLATION.

SIDE SEAM OVERLAP STAPLE DETAIL
 NO SCALE (6/14)


CHANNEL DETAIL
 NO SCALE (1/14)

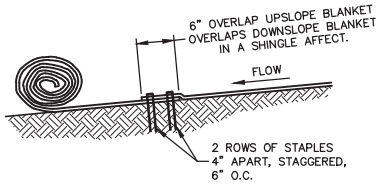


CHANNEL BLANKET END OF ROLL OVERLAP
 NO SCALE (7/14)

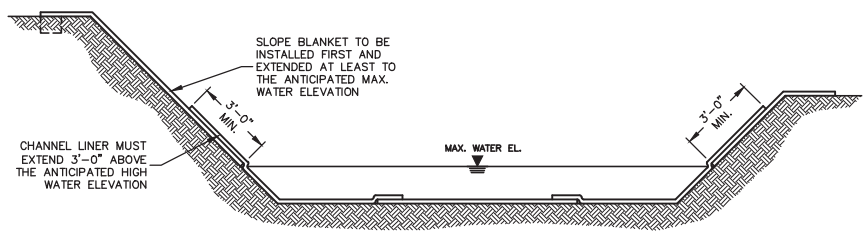


CHANNEL INSTALLATION METHOD "A"
 NO SCALE (2/14)

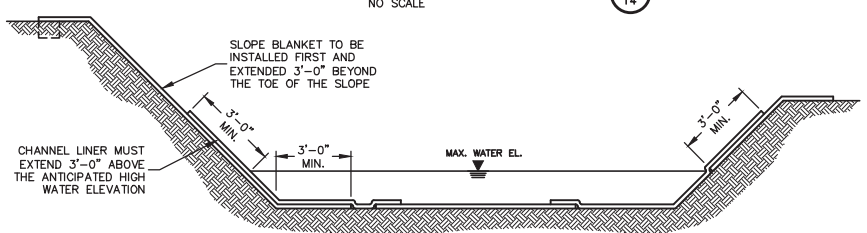


CHANNEL INSTALLATION METHOD "B"
 NO SCALE (3/14)

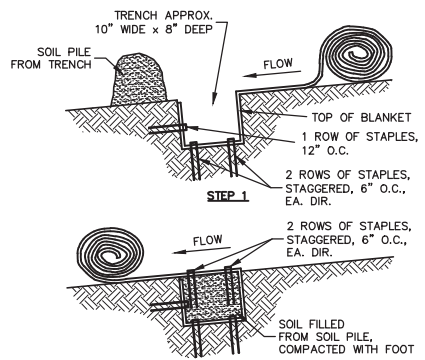


CHANNEL TRENCHING METHOD "A" STEP 1
 NO SCALE (8/14)




CHANNEL TERMINATION PLAN
 NO SCALE (4/14)




CHANNEL TERMINATION
 NO SCALE (5/14)

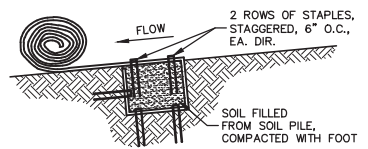

CHANNEL TRENCHING METHOD "A" STEP 2
 NO SCALE (8/14)

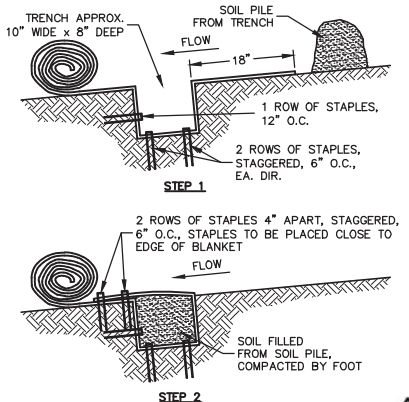

CHANNEL TRENCHING METHOD "B" STEP 1
 NO SCALE (9/14)

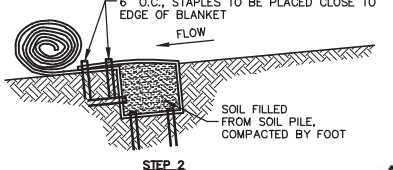


CHANNEL TRENCHING METHOD "B" STEP 2
 NO SCALE (9/14)

Curlex® NetFree™ Staple Pattern Guide

Application	Channel
	≤ 1.0 lb/ft² (48 Pa) Shear Stress
	≤ 3.0 ft/sec (0.9 m/sec) Velocity
Staple Pattern	B

● = Staple Placement



Notes:
 1. Recommended staples are minimum 4 in long 100% biodegradable E-Staple®, as provided by American Excelsior Company, for cohesive soils and 6 in long 100% biodegradable E-staple®, as provided by American Excelsior Company, for non-cohesive soils.
 2. Staples shall be placed on a stitch line and for best results insert staples so heads are parallel to the flow of water.
 3. Adjust staple pattern so staples are placed in critical channel points (e.g. slope interface, channel bottom) as illustrated below.

