

TriNet™ Family of TRMs

Turf Reinforcement Mats

Product Description

Permanent turf reinforcement mats, for long-term protection against wind and water erosion, are a natural choice in place of stone or riprap in swales, ditch bottoms, and on long, steep slopes.

MATERIAL CHARACTERISTICS

TriNet™ Straw/Coconut

A blend of 70% straw and 30% coconut fibers and two layers of heavy duty UV stabilized netting (top and bottom) with an ultra heavy duty (middle) netting designed to provide permanent service life and reinforcement between established vegetation and root systems on slopes and in channel bottoms. TriNet Straw/Coconut is a biocomposite turf reinforcement mat (TRM).

TriNet™ Coconut

Coconut fibers and two layers of super heavy duty UV stabilized netting (top and bottom) with an ultra heavy duty (middle) netting designed to provide permanent service life and reinforcement between established vegetation and root systems on slopes and in channel bottoms. TriNet Coconut is a biocomposite turf reinforcement mat (TRM).

TriNet™ Curlex® (coming soon)

TriNet™ Recyclex® (coming soon)


TriNet™ Straw/Coconut
(now available)



TriNet™ Coconut
(now available)



TriNet™ Curlex®
(coming soon)

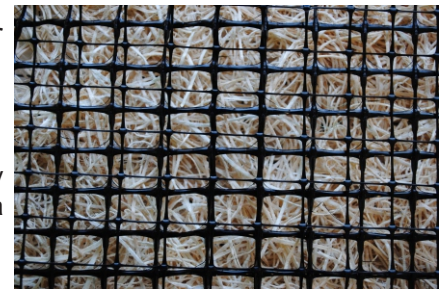

TriNet™ Recyclex®
(coming soon)



TriNet family of TRMs are available individually wrapped or in master packs to allow for mechanical unloading and stacking.

PERFORMANCE CAPABILITIES^a

TriNet family of TRMs can handle wind and water on steep slopes. These heavy duty TRMs provide permanent protection in critical areas where vegetation alone requires extra protection from shear stress forces.

TriNet Straw/Coconut

Channels	Shear Stress:	480 Pa (10.0 lb/ft ²) (vegetated)
Slopes	Grade:	up to .5H:1V

TriNet Coconut

Channels	Shear Stress:	575 Pa (12 lb/ft ²) (vegetated)
Slopes	Grade:	up to .5H:1V

TriNet Curlex (coming soon)

TriNet Recyclex (coming soon)

^a Slope and channel performance ratings are based on typical industry values.



American
Excelsior
Company®



Earth Science Division

Arlington, Texas (800) 777-(SOIL) • www.Curlex.com

TriNet™ Family of TRMs

Turf Reinforcement Mats

SUGGESTED SPECIFICATIONS

Choosing the Right TriNet TRM Product

These heavy duty TRMs are available in a variety of fiber types and netting combinations to match the appropriate job site requirements. The TriNet family of TRM's three dimensional matrices are specifically designed to provide permanent surface support and/or structural support for vegetation root systems.

TriNet Straw/Coconut Specifications

Recommended Use: Slopes to .5H:1V, channel bottom applications, Shear stress 480 Pa (10.0 lb/ft²) (vegetated)

Roll Sizes: 80 yd² (8ft x 90ft), 160 yd² (16ft x 90ft)

Straw/Coconut Matrix^a: 0.500 lb/yd²

Product Weight^a: 0.770 lb/yd²

Netting: Top - Heavy Duty Black
Middle - Ultra Heavy Duty Black
Bottom - Heavy Duty Black

TriNet Coconut Specifications

Recommended Use: Slopes to .5H:1V, channel bottom applications, Shear stress 575 Pa (12.0 lb/ft²) (vegetated)

Roll Sizes: 80 yd² (8ft x 90ft), 160 yd² (16ft x 90ft)

Coconut Matrix^a: 0.500 lb/yd²

Product Weight^a: 0.833 lb/yd²

Netting: Top - Super Heavy Duty Black
Middle - Ultra Heavy Duty Black
Bottom - Super Heavy Duty Black

TriNet Curlex Specifications

Recommended Use: (coming soon)

Roll Sizes:
Curlex Fiber Matrix^a:
Product Weight^a:
Netting:

TriNet Recyclex Specifications

Recommended Use: (coming soon)

Roll Sizes:
Recyclex Matrix:
Product Weight:
Netting:

^a Weight is based on a dry fiber weight basis at time of manufacturer. Baseline moisture content of Straw, Coconut, and Great Lakes Aspen excelsior are 15%, 20%, and 22%, respectively.

Installation

Before installing TriNet TRMs, the seedbed shall be inspected by the Owner's Representative to ensure it has been properly compacted and fine graded to remove any existing rills. It shall be free of obstructions, such as tree roots, projections such as stones, and other foreign objects. Grass seed shall match soil conditions to allow for maximum germination, dense vegetation, and a structural root system. Contractor shall proceed when satisfactory conditions are present. After the area has been properly shaped, seeded, fertilized, and compacted, locate the start of the roll, making sure the roll is facing toward the area to be covered, and then roll out the TRM. TriNet TRMs shall be rolled out flat, even, and smooth without stretching the material then anchored to the subgrade.

Slopes: It is recommended the TRM be installed vertically on the slope; however, on short slopes it may be more practical to install horizontally across the width of the application when agreed upon by the Engineer prior to installation. If more than one width is required, overlap the edges of the vertically installed TRMs and secure the TRMs with a common row of staples. TriNet TRMs shall be trenched at the head of the slope if the blanket cannot be extended three feet over the slope crest or if overland flow is anticipated from upslope areas.

Channels: TriNet TRMs shall be centered to offset a seam in the middle of the waterway. They shall be installed in the same direction as the water flow. The adjoining TRMs shall be installed away from the center of channel and overlapped. TriNet TRM installation should continue up the side slopes three feet above the anticipated high water elevation. Flanks exposed to runoff, or sheet flow, must be trenched in. TriNet TRM shall be trenched at the start of channels. TriNet TRM shall be anchored using a staggered staple pattern at end of roll overlaps and end of roll terminations.

Disclaimer: TriNet Straw/Coconut, TriNet Coconut, TriNet Curlex, and TriNet Recyclex is a system for erosion control and re-vegetation on slopes and channels. American Excelsior Company (AEC) believes that the information contained herein to be reliable and accurate for use in erosion control and re-vegetation applications. However, since physical conditions vary from job site to job site and even within a given job site, AEC makes no performance guarantees and assumes no obligation or liability for the reliability or accuracy of information contained herein for the results, safety, or suitability of using TriNet TRMs, or for damages occurring in connection with the installation of any erosion control product whether or not made by AEC or its affiliates, except as separately and specifically made in writing by AEC. These specifications are subject to change without notice.



If you would like to receive more information or consult with one of our Customer Care Center Specialist, please call us toll free at (888-352-9582)
PDF download specifications in the Technical Support Library at www.Curlex.com

Form# 214/042518E