



SLOPE DETAIL
NO SCALE




OVER SLOPE CREST METHOD
NO SCALE

DO NOT NEED TO TRENCH BLANKET IN IF IT CAN BE EXTENDED A MINIMUM OF 3'-0" OVER THE CREST OF THE SLOPE.

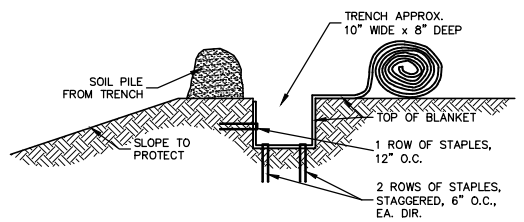


STEP 1

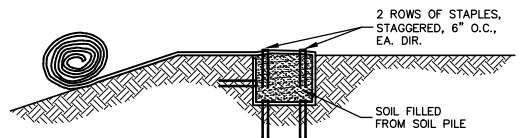


STEP 2


SLOPE TRENCHING METHOD "A"
NO SCALE

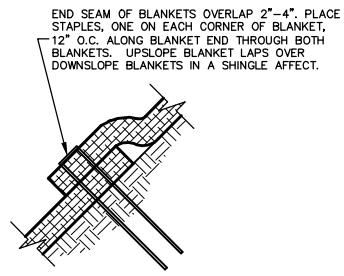


END ROLL OVERLAP
NO SCALE

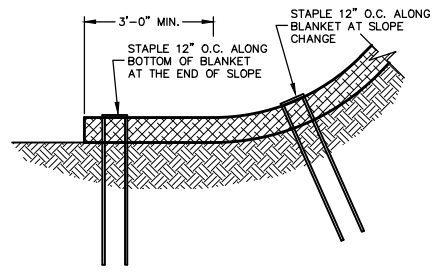

BOTTOM OF SLOPE TERMINATION IF INSTALLED 3' BEYOND THE TOE OF SLOPE
NO SCALE

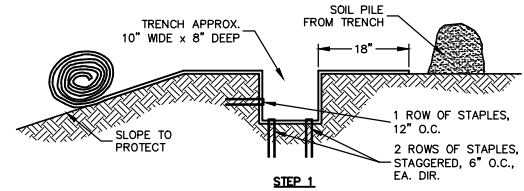

STEP 1

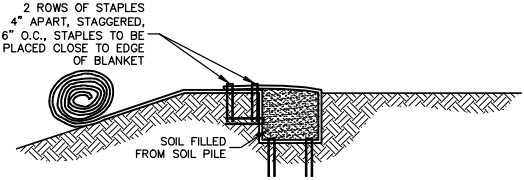

STEP 2


SLOPE TRENCHING METHOD "B"
NO SCALE

AEC Premier Straw/Coconut™ Staple Pattern Guide

For 8 ft wide AEC Premier Straw/Coconut Erosion Control Blankets

Application	Slope	
	≤ 3H:1V	≤ 1.5H:1V
Staple Pattern	A	B

● = Staple Placement

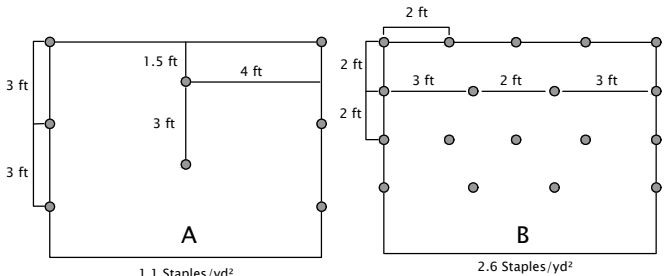


1.1 Staples/yd²


2.6 Staples/yd²

Notes:

1. Recommended staples are minimum 4 in biodegradable E-Staple®, as provided by American Excelsior Company, or 6 in wire for cohesive soils and 6 in biodegradable E-staple®, as provided by American Excelsior Company, or 8 in wire for non-cohesive soils.
2. For best results, insert staples so heads are parallel to the flow of water.
3. For additional pull-out resistance, consider using TL-TA2 Gripple twist anchors for tough/cohesive soils or TL-TA1 Gripple twist anchors for moderate/non-cohesive soils.
4. Adjust staple pattern so staples are placed in critical slope points (e.g. slope change)



BOTTOM OF SLOPE TERMINATION IF INSTALLATION 3' BEYOND TOE OF SLOPE IS NOT POSSIBLE
NO SCALE

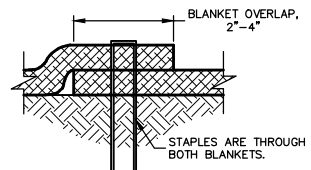

SIDE SEAM OVERLAP STAPLE DETAIL
NO SCALE

