



**SLOPE DETAIL**  
NO SCALE




**OVER SLOPE CREST METHOD**  
NO SCALE

DO NOT NEED TO TRENCH TRM IF IT CAN BE EXTENDED A MINIMUM OF 3'-0" OVER THE CREST OF THE SLOPE.

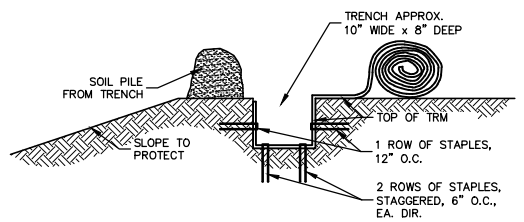


STEP 1

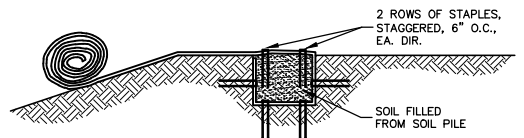


STEP 2


**SLOPE TRENCHING METHOD "A"**  
NO SCALE




**END ROLL OVERLAP**  
NO SCALE

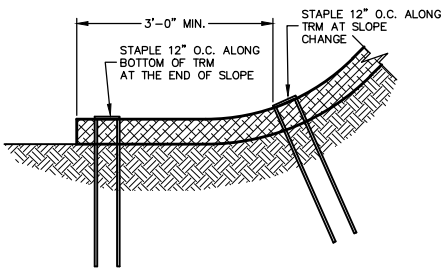

**BOTTOM OF SLOPE TERMINATION IF INSTALLED 3' BEYOND THE TOE OF SLOPE**  
NO SCALE

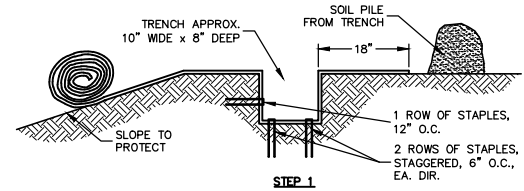


STEP 1

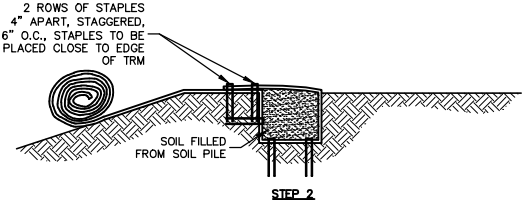

STEP 2

**SLOPE TRENCHING METHOD "B"**  
NO SCALE






**SIDE SEAM OVERLAP STAPLE DETAIL**  
NO SCALE


**Curlex® Enforcer® Pattern Guide**  
For 8 ft wide Curlex Erosion Control Blankets  
Adjust horizontal staple spacing for 4 ft and 16 ft wide Curlex Erosion Control Blankets

Application	Slope		
	≤ 4H:1V	≤ 3H:1V	≤ .5H:1V
Staple Pattern	A	B	C

● = Staple Placement



- Notes:
1. Recommended staples are minimum 4 in biodegradable E-Staples®, as provided by American Excelsior Company, or 6 in wire for cohesive soils and 6 in biodegradable E-staples®, as provided by American Excelsior Company, or 8 in wire for non-cohesive soils.
  2. For best results insert staples so heads are parallel to the flow of water.
  3. For additional pull-out resistance, consider using TL-TA2 Gripple twist anchors for tough/cohesive soils or TL-TA1 Gripple twist anchors for moderate/non-cohesive soils.



**BOTTOM OF SLOPE TERMINATION IF INSTALLATION 3' BEYOND TOE OF SLOPE IS NOT POSSIBLE**  
NO SCALE

