



CURLEX® HI-VIS EXCELSIOR LOG™
TRIPLE STACK PERIMETER CONTROL (TOP VIEW) 1
41
NO SCALE

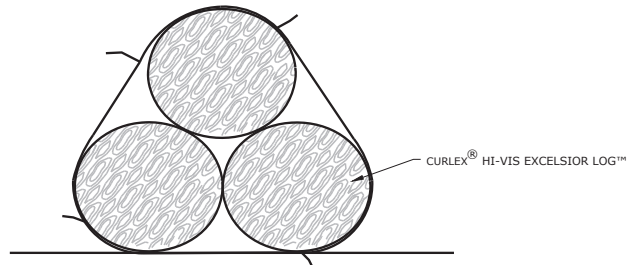

CURLEX® HI-VIS EXCELSIOR LOG™
CABLE TIES (END VIEW) 2
41
NO SCALE

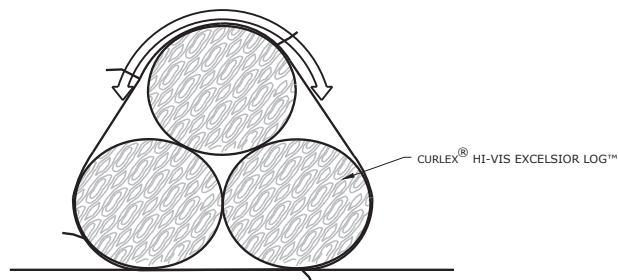

CURLEX® HI-VIS EXCELSIOR LOG™
OPTIONAL STRAP OR WEIGHTED SYSTEM 3
41
NO SCALE

NOTES:

1. USE HEAVY DUTY CABLE TIES (ZIP-TIES) OR OTHER SUITABLE DEVICE AT EVERY ABUTMENT AS SHOWN.
2. IN-BETWEEN GROUPED ABUTMENTS ADD ADDITIONAL TIES APPROXIMATELY EVERY 33" BETWEEN THE NEXT ABUTMENT GROUP.
3. USE OPTIONAL STRAP OR WEIGHTED SYSTEM, WHEN APPLICABLE (SEE 3/41).