



THE MOST TRUSTED NAME IN EROSION CONTROL

Curlex[®] Bloc[®]

Natural Filter of Contaminated Stormwater and Construction Runoff

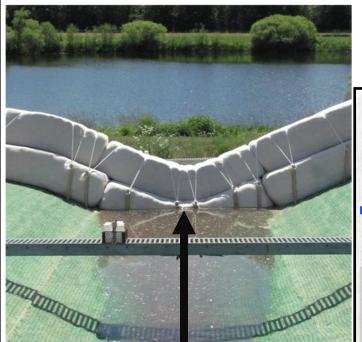



Fly Ash Slurry Flows Through Curlex Bloc Filtering Station

In the test shown above, the Curlex Bloc filter station reduced TSS of the fly ash slurry by nearly 95%. Curlex Blocs are filtering products because they have an initial flow rate of 35 GPM/ft2 or greater. Curlex Blocs are made in the U.S. from all-natural, sustainably sourced Great Lakes Aspen excelsior fibers. They can be encased in synthetic mesh or you can choose a cotton mesh for an all-natural solution.

For more information on our full line of erosion and sediment control products visit us at <u>www.americanexcelsior.com</u>